

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 July 2001 (12.07.2001)

PCT

(10) International Publication Number
WO 01/50739 A1

(51) International Patent Classification?: H04N 5/445

(21) International Application Number: PCT/US00/32888

(22) International Filing Date: 4 December 2000 (04.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/474,216 29 December 1999 (29.12.1999) US

(71) Applicant: INTEL CORPORATION [US/US]; 2200
Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventor: RASHKOVSKIY, Oleg, B.; 19312 Greenwood
Drive, Cupertino, CA 95014 (US).

(74) Agent: TROP, Timothy, N.; Trop, Pruner & Hu, P.C.,
Suite 100, 8554 Katy Freeway, Houston, TX 77024 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AUTOMATIC CHANNEL SWITCHING

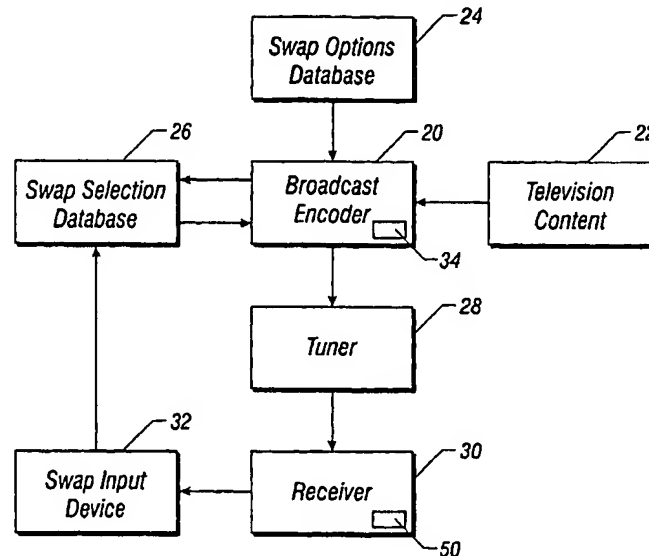

(57) Abstract: A system allows a user to select prompts during the viewing of video transmission on a first channel about events that may have occurred in the course of a transmission on a second channel. The user may be provided with a mechanism, such as a remote control, that allows the user to switch to the second channel after receiving the prompt on the first channel. Since the second channel is continuously recorded, the user can switch to the second channel to view a recorded portion of the transmission on the second channel up to the event on the second channel, to enable the user to decide whether to switch to view the second channel.

WO 01/50739 A1

- 1 -

Automatic Channel Switching

Background

This invention relates generally to the transmission and receipt of one or more video transmissions such as television programs.

Enhanced television program transports such as satellite and cable systems provide the user with a vast number of television program options. In many cases, the number of options exceeds the user's ability to keep track of what programs the user would like to view. Thus, the user watches one program and misses another program which may be broadcast in the same time period.

An electronic program guide (EPG) allows the user to select for viewing one of a plurality of programs displayed on a graphical user interface. Thus, the EPG facilitates the selection of programs for viewing.

A need continues to exist for a way to enable the user to keep track of various programs which may be broadcast during the same time interval or during a given time interval in which the user may wish to keep track of more than one program. For example, in some satellite systems, a large number of sporting events are broadcast at the same time. For example, football games from a variety of localities across a geographic area may be displayed in overlapping time frames. Many sports enthusiasts would like to keep track of the progress of the games on different channels, but it is difficult to keep track of what broadcasts are available, at the same time the user is watching a given broadcast.

Conventionally, users have attempted to overcome this problem by constantly switching back to the program guide in order to determine what other programs are available. This is time consuming and annoying since the television picture is constantly being switched.

Thus, there is a continuing need for a better way to enable users to monitor a plurality of transmissions at one time.

Summary

In accordance with one embodiment, a first transmission is monitored while a receiver is tuned to receive a second transmission. A notification is generated when a predetermined event occurs during the first transmission. The method includes enabling the display of a portion of the second transmission before the event occurred.

- 2 -

Other aspects are set forth in the accompanying detailed description and claims.

Brief Description of the Drawings

Figure 1 is a block diagram of one embodiment of the present invention;

Figure 2 is a flow chart for one embodiment of software that may be used in the
5 broadcast encoder shown in Figure 1;

Figure 3 is a flow chart for one embodiment of software that may be used with the receiver of Figure 1;

Figure 4 is a front elevational view of a remote control useful with the receiver shown in Figure 1;

10 Figure 5 is a front elevational view of a display screen associated with the receiver shown in Figure 1;

Figure 6 is a block diagram of an embodiment of the receiver shown in Figure 1;

Figure 7 is another display screen which may be used with the receiver shown in Figure 1;

15 Figure 8 is a depiction of a display screen in accordance with another embodiment of the present invention;

Figure 9 is a depiction of a display screen in accordance with the embodiment shown in Figure 8;

20 Figure 10 is another depiction of a display screen useful with the embodiment shown in Figure 8; and

Figure 11 is a flow chart for software which may be implemented on the receiver of Figure 1 and in connection with the embodiment shown in Figure 8.

Detailed Description

25 A system for transmitting and receiving video transmissions, shown in Figure 1, may be used to implement embodiments in which the video transmission is provided by a wired or wireless broadcast or by any of a variety of multicasting systems, including systems which transmit over satellites, cable systems, the Internet, or through computer networks.

A video transmission facility, such as the broadcast encoder 20, may transmit video to a plurality of tuners, including the tuner 28 which is tuned to receive the transmission. The
30 tuner 28 passes the received transmission to a receiver 30 which decodes the transmission.

- 3 -

The transmission may include, for example, a wireless television broadcast together with additional information which may include script. Script may be a command list that can be executed without user interaction. The receiver may respond to the transmitted script by inputting information to a swap input device 32. The swap input device 32 may in turn communicate with a swap selection database 26 associated with the broadcast encoder 20. Thus, the broadcast encoder 20 may encode or combine television content 22, and in some embodiments, information from a swap option database 24, and transmit this information to the receiver 30.

The swap option database 24 affords the receiver user the opportunity to select information about other transmissions which may occur during a particular transmission which the user intends to view. Thus, the swap option database may allow the receiver user to select information about programs that are being transmitted while another program is in progress. For example, the user of the receiver may wish to watch a first football broadcast but may wish to be notified about events occurring in a second football broadcast or other event. The available events that give rise to a user notification may be stored in the swap options database 24. The user may select, using the swap input device 32, various conditions which may occur in the second broadcast which would cause a notification to be issued to the user in the course of the first broadcast. The user's selections may then be stored in the swap selection database 26.

The user, in response to that notification, may elect to switch to view the second program. Thus, for example, the receiver may receive an on-screen prompt from the broadcast encoder 20 swap selection database 26 that a second broadcast is about to end in two minutes. The user then would be given the option to switch channels to view the second broadcast. Alternatively, the second program may automatically be displayed in a picture-in-picture overlay over the first program in response to a notification.

The display of the second program in a picture-in-picture overlay may involve using a different size picture-in-picture overlay for the replay of the second program compared to a normal picture-in-picture display. In addition, the second program may be overlaid in a transparent mode enabling the viewer to look through the overlay to see the underlying program. Of course, a full screen replay may also be utilized. Moreover, while the second program is being replayed in a full screen mode, the first program could be stored or shown in a picture-in-picture mode. Thus, if the first program is stored while the portion of the

- 4 -

second program is being viewed, the viewer may go back and see any portion of the first program that was missed while viewing the second program and determining whether to switch to the second program.

Referring now to Figure 2, software 34 for implementing the system may be stored in
5 a memory in the broadcast encoder 20, which may be a computer server in one embodiment of the present invention. The software 34 begins by receiving transmission information such as television program information from the television content provider 22 (block 36). The encoder 20 also may determine what swap options are available for a particular broadcast from the swap options database 24 (block 38). The appropriate content transmission and the
10 corresponding swap options may then be broadcast as indicated in Figure 1. Swap options may include the options that would be available to the viewer of one broadcast to obtain information about another ongoing broadcast in the same general time interval.

The receiver 30 user may make swap selections, through the input device 32, at any time, for example among the options afforded by the broadcast encoder 20. Those selections
15 may be stored in the database 26. If the user makes a swap selection in response to a query afforded at diamond 40 in Figure 2, a flag is set. The software continually checks the time, as indicated in block 42, to see if the time corresponds to a time when a given swap option should be invoked. For example, in connection with a swap option that provides a message to the viewer when two minutes are remaining in another broadcast, the software checks to
20 determine whether that time has arrived. If the time has arrived, as indicated in diamond 44, a prompt is sent to the receiver 30 to prompt the user to indicate whether the user wishes to "swap" or change channels to receive the other broadcast, as indicated in block 46.

An example of a display screen 74 prompt message, shown in Figure 5, includes information 76 about the other transmission on a second channel and a query 78 as to whether
25 the user would like to switch to the other transmission. If the user elects to switch to the other transmission, the channel is switched automatically, as indicated in block 48, in Figure 2. Otherwise, the user continues to receive the same transmission that he or she was already viewing and the prompt message is removed after a predetermined time interval.

Rather than simply transmitting the content on a second channel, the broadcast
30 encoder can send the portion of the second channel content that proceeded the occurrence of the event which generated the prompt. In this way, the viewer can judge whether or not the viewer wishes to view the second channel based on a clear understanding of the event itself.

- 5 -

Thus, for example, a predetermined portion of the broadcast on the second channel that preceded the event may be transmitted for viewing.

In accordance with one embodiment of the present invention, a short portion of the transmission on the second channel preceding the event, such as forty-five seconds, may be provided to the viewer upon detection of an event. In this way, the viewer can understand what happened to generate the event and can determine whether or not to watch the second channel. In another embodiment of the present invention, the viewer may be provided with a short portion preceding the event and a short portion after the event to enable the viewer to get a complete understanding of the event and to make a decision about whether to switch to real time display of the second channel. In one embodiment, the portion from the second channel may be presented in a picture-in-picture display overlaid on the display of the first channel.

Thus, in the embodiment just described, the software for controlling the swap option is provided on the head end at the transmitter or broadcast station. The available swap options are transmitted to the receiver and the user selections at the receiver may be transmitted through a side band channel back to the broadcaster. In this way the broadcast station keeps track of all the timing information and the user selections and provides the prompts and switching capabilities as requested. Of course, these same controls could also be provided at the receiver end as well, for example, by providing a plurality of tuners in the receiver each monitoring a different broadcast or other video transmission. Also, the same controls could be implemented by a content aggregation such as a cable provider, a satellite broadcasts, or the like.

Figure 3 illustrates a flow for software 50 which may be stored in a memory on the receiver 30 as indicated in Figure 1. In Figure 3, the receiver 30 may receive a given television broadcast or other video transmission as indicated in block 52. The television information and the accompanying broadcast script may be parsed as suggested in block 54. If the script includes a swap prompt, as shown in diamond 56, the prompt may be displayed on the receiver's screen as indicated in block 58. Next a check determines whether the user activated the swap option, as indicated in diamond 60. If so, the channels are switched, as indicated in block 62, and the flow cycles back to the beginning.

If the user elects to view the transmission on the other channel, instead of viewing the transmission on the other channel in real time, the viewer may be provided a recorded slice of

- 6 -

the transmission on the other channel that preceded, by a predetermined time period, the event which triggered the swap prompt. The duration of this time interval may be programmed by the user. Thus, when the viewer elects to swap, the viewer is provided with a predetermined recorded portion of the transmission on the other channel which preceded the event. In one embodiment of the present invention, the prerecorded portion may include a forty-five second portion preceding the event together with forty-five seconds after the event. In other words, the second channel is continually recorded either at the receiver or at the broadcast encoder. When a swap is elected, the forty-five seconds preceding the swap event are played and the forty-five seconds that occurred (during the replay of the first forty-five second clip) after the event, may also be played in one embodiment of the present invention. Thus, in one example, the viewer may be provided with the forty-five seconds preceding the event and the forty-five seconds after the event. This allows the user to make an informed decision about whether to view the second channel.

In a system which records the information on the receiver, the incoming broadcast on the second channel which is being monitored may be continuously recorded. In one embodiment of the present invention, a first in last out memory may be utilized to continuously store incoming video on the second channel. In this way, a short portion of that transmission is always available for replay. If a swap is elected, that recorded interval in the memory may be provided for display and the next succeeding material of the same duration may be recorded and thereafter provided for display, in one embodiment of the present invention. The information from the monitored channel may be recorded using conventional storage devices including hard disk drives as one example.

Otherwise, a check is made in diamond 64 to see if any new swap requests have been made. In other words, a check is made to determine whether the user wishes to input information about swap options which the user may like to invoke. If so, this information is transmitted back to the broadcaster as indicated in block 66 or stored on the receiver. Otherwise, the currently displayed transmission is allowed to continue, as indicated in block 68.

A remote control 70 (which may be used as the swap input device 32 of Figure 1), shown in Figure 4, may be coupled to receiver 30. The control 70 may provide a power on/off button, channel input buttons, selectors for changing channels and volume, and the ability to select between different receive options such as a television option and a video

- 7 -

cassette recorder (VCR) option. In addition, the receiver 70 includes a hot swap button 72 which sends a signal to the receiver to indicate that the user would like to invoke the swap option and to switch to the other program.

5 An example of a computer system 80 for implementing the receiver 30 shown in Figure 1 may include a processor 82, as shown in Figure 6. The receiver 30 may be a computer system connected to a television receiver, or a set-top computer system which is designed for use with a television system. Alternatively, the receiver 30 may be a television or a multimedia system or another appliance-like device.

10 The processor 82 is coupled to a host bus 84 which in turn is coupled to a host bridge 86. The host bridge 86 couples a main memory 88, an accelerated graphics port (AGP) bus 92 and a graphics device 94. The main memory 88 may couple a system management (SM) bus 90.

15 The graphics device 94 receives video inputs and provides outputs to a display monitor 96 or to a television receiver 98 through a encoder 100. The graphics device receives information from a graphics local memory 104 and a video basic input/output system (BIOS) 102. The video inputs may include television broadcasts, camera or VCR inputs as well as digital video disk (DVD) information.

20 The host bridge 86 is coupled to a bus 106 which may receive a plurality of peripheral devices in slots 108. The bus 106 may also be coupled to a bus-to-bus bridge 110 which couples still another bus 118. The bus 118 may also include peripheral device receiving slots 120. The bus-to-bus bridge 110 may couple to a plurality of ports 112, 113, 114 and 116 which may connect to additional storage devices, such as floppy disc drives, compact disk drives, or other peripherals, for example, through universal serial bus (USB) ports. The bus 118 may receive a hard disk drive 124 which stores software 50 and 140. The bus 118 may
25 also be connected to the system basic input/output system (BIOS) 122.

30 The hard disk drive 124 may be utilized to automatically store the transmission on the monitored channel in a first in last out sequence. In one embodiment of the present invention, a predetermined time interval is automatically queued for display when an event occurs. For example, the system may always store forty-five seconds of content in a first in last out sequence. When an event is detected, that stored information may be queued for display. In another embodiment of the present invention, when the stored information is queued for display, the succeeding interval is recorded while the original stored information

- 8 -

is being displayed. The second stored information is thereafter queued for display so that the viewer can view a short portion immediately before and after the triggering event.

It should be understood that the computer system 80 is only meant to be an example and any number of computer designs may be utilized to implement embodiments of the present invention. The system 80 may be used as the receiver and/or as the broadcast encoder 20 in some embodiments.

The graphical user interfaces described herein are visual representations of memory states. The graphical user interface displayed on a display 96 or 98 may be stored in one or more of the memory 104, 88 and 124, for example.

A swap options prompt display screen 126, shown in Figure 7, may be utilized by the receiver 30 to either display the selected prompts or to receive inputs of selected prompts from the user. In the example illustrated by screen 126, a plurality of football games that are televised at the same or similar times are automatically displayed for a given day. The screen 126 indicates the channel for each game and an on/off indication to indicate whether or not the user wishes to have the swap option activated. For example, in the illustrated embodiment, the Packers vs. Lions game has the swap option "off" while the remaining games have invoked swap option.

With respect to the Giants vs. Cowboys game, the option "Time-R" indicates that the user will be prompted with two minutes remaining that the Giants vs. Cowboys game is about to end. Similarly, in the Cardinals vs. 49ers entry, the prompt is set to occur when a team scores. Meanwhile, for the Redskin vs. Saints game, the prompt is automatically provides every five minutes. For the Dolphins vs. Jets game, the DIFF prompt is invoked. This prompt is actuated when the score differential is less than 7 points. In each case when the condition arises, the user receives a screen prompt of the type shown in Figure 5 and is given the option to hot swap by activating a button 72 on the control 70 to switch to the other broadcast.

With some swapping options, such as those that make use of score or difference in score, a monitoring operation may be done with respect to the closed caption information that may be broadcast with the television program, or in connection with data transmitted for example in the vertical blanking interval. Techniques are available for monitoring the closed caption information and for reporting when a given event occurs. The closed caption text may be scanned and searched for given preprogrammed words. When these words occur an

- 9 -

event may be triggered. Thus, the word "touchdown" or numerical information may be scanned to provide a score differential which would then activate the present system.

One device for achieving the closed caption text scanning is the All-In-Wonder from ATI Technologies, Inc. Another technique is to convert the audio to text and use optical
5 character recognition scanning to locate the search terms.

Alternatively, the analysis may be undertaken at the broadcast encoder 20. When a given event occurs and is entered at the broadcast encoder, the broadcast encoder 20 may transmit the necessary information in the form of scripts for example, to create the screen prompt. One technique for providing the scripts is disclosed in U.S. Patent 5,818,441
10 assigned to Intel Corp.

The desired swap options can be implemented using an electronic programming guide (EPG) as illustrated in Figure 8. In an EPG, a plurality of programs are illustrated by graphical user interface blocks 130 on an EPG screen 128 displayed by the receiver 30. This screen may be initiated by operating a given button on a remote control 70, for example. A
15 cursor 132 may be provided to allow the user to select, through the remote control, a desired program.

When the user selects a given program on the EPG screen 128, the user may be prompted to indicate whether a hot swap feature is desired. For example, as shown in Figure 9, after the block 130 is selected by clicking the cursor 132, the user is automatically advised
20 of the program selected, as indicated at 136, and can be queried, as indicated at 138, as to whether one or more hot swap options are desired. In the illustrated example with screen 134, a simple "yes" or "no" response is requested, for example, to implement the two minute warning hot swap prompt discussed previously.

Turning now to Figure 10, if a hot swap selection is made, as indicated in Figure 9, the user may be provided with a plurality of program options in graphical user interface
25 boxes 164 on a hot swap selection screen 160. The user may be asked to indicate which program, represented by a box 164, is the one that will be selected if the hot swap is invoked. The user may make the selection by mouse clicking on the appropriate box 164.

An example of a flow for implementing the software 140 for providing the
30 functionality with an EPG begins with the display of the programming guide, such as the one illustrated in Figure 8, as indicated in block 142 in Figure 11. After the display of the EPG, a check determines whether a transmission, such as a television program has been selected, as

- 10 -

indicated in diamond 144. If so, a hot swap message box (for example as illustrated in Figure 9) is provided as indicated in block 146 in Figure 11. If the user selects the hot swap option (as indicated by the "yes" prong of diamond 148) the hot swap selection may be stored as suggested in block 150. The storage could occur in the local receiver or it could be
5 transmitted to the broadcaster in a broadcaster implemented system and stored in the database 26.

If a swap selection is made, the video which is received by the receiver may be continuously stored, in one embodiment of the present invention, as indicated in block 160. For example, a predetermined time period may be stored in a first in last out sequence. As a
10 result, a predetermined period is always available for viewing when a triggering event is detected.

Next, in diamond 152, a query determines whether the time equals the predetermined time which invokes the hot swap prompt. If so, the hot swap prompt is displayed as indicated in block 154. If the user selects the hot swap option, as indicated in diamond 156, the portion
15 of a second transmission which immediately preceded the swap event, is then queued for display. In the case where the information is provided from the broadcast head end, this information is automatically provided over the broadcast transport. In the case where the information is stored on the local receiver, the stored information in the first in last out memory is automatically queued for display. In one embodiment of the present invention, a
20 predetermined period before and after the triggering event are displayed.

In one embodiment of the invention, after viewing this information, the user can then make the decision about whether change the channel or to remain with the original channel as indicated in diamond 158.

In other embodiments, instead of checking the time as illustrated by diamond 152, a
25 check may be made of another transmission to determine if certain selected words have been uttered. If so, as determined by monitoring the closed caption script for example, the hot swap prompt may be displayed. In addition, embodiments of the invention may be useful in monitoring for the start of a show on a different channel than one being viewed.

While the present invention has been described with respect to a limited number of
30 embodiments, those skilled in the art will appreciate numerous modifications and variations therefrom. It is intended that the appended claims cover all such modifications and variations as fall within the true spirit and scope of this present invention.

- 11 -

What is claimed is:

- 1 1. A method for receiving video transmissions comprising:
2 monitoring a first video transmission while a receiver is tuned to receive a
3 second transmission;
4 generating a notification when a predetermined event occurs during said first
5 video transmission; and
6 enabling the display of a portion of said second transmission before said event
7 occurred.
- 1 2. The method of claim 1 further including receiving a second video transmission
2 that is a television broadcast.
- 1 3. The method of claim 1 wherein generating a notification includes producing
2 an on-screen prompt on a display, displaying said second video transmission.
- 1 4. The method of claim 3 further including automatically switching the receiver
2 to the first video transmission in response to a user command in response to said prompt.
- 1 5. The method of claim 4 further receiving a signal indicating a button on a
2 remote control was activated to automatically switch to the first video transmission.
- 1 6. The method of claim 1 wherein generating a notification includes selecting a
2 prompt which provides an indication when a set amount of time is remaining in the second
3 transmission.
- 1 7. The method of claim 1 wherein generating a notification includes selecting a
2 prompt which occurs automatically at a given time interval.
- 1 8. The method of claim 1 wherein monitoring includes monitoring the words
2 spoken in the course of the first transmission.

- 12 -

1 9. The method of claim 8 further including monitoring closed caption script
2 which accompanies said second transmission.

1 10. The method of claim 1 including generating a list of a plurality of events,
2 allowing the user to select an event and generating the notification when the user selected
3 event occurs.

1 11. The method of claim 1 further including continuously storing said first
2 transmission.

1 12. The method of claim 11 wherein said continuously storing includes
2 continuously storing a portion of said first video transmission in a first in last out memory.

1 13. The method of claim 12 including automatically displaying said stored first
2 transmission upon detection of said predetermined event.

1 14. An article comprising a medium for storing instructions that cause a
2 processor-based system to:
3 monitor a first transmission while a receiver is tuned to receive a second
4 transmission;
5 generate a notification when a predetermined event occurs during said first
6 transmission; and
7 enable the display of a portion of said second transmission before said event
8 occurred.

1 15. The article of claim 14 further storing instructions that cause a processor-
2 based system to produce an on-screen prompt on a display displaying said second video
3 transmission.

1 16. A processor-based system comprising:
2 a processor;

- 13 -

3 a video receiver coupled to said processor to tune to at least two video
4 transmissions;

5 storage coupled to said processor, said storage to store a portion of a first
6 video transmission; and

7 a program stored in said storage that causes said processor to monitor a first
8 video transmission while said receiver is tuned to receive a second video transmission, to
9 generate a notification when a predetermined event occurs during said first video
10 transmission and to cause the display of a portion, stored in said storage, of said first
11 transmission before said event occurred.

1 17. The system of claim 16 wherein said processor causes a portion of said first
2 transmission to be continuously stored in a first in last out memory of said storage.

1 18. The system of claim 16 wherein said program allows the selection of said first
2 or second transmission for viewing after said portion of said first transmission before said
3 event occurred has been displayed.

1 19. The system of claim 16 including a monitor that collects information about the
2 status of said first transmission.

1 20. The system of claim 16 including a remote control unit.

1/8

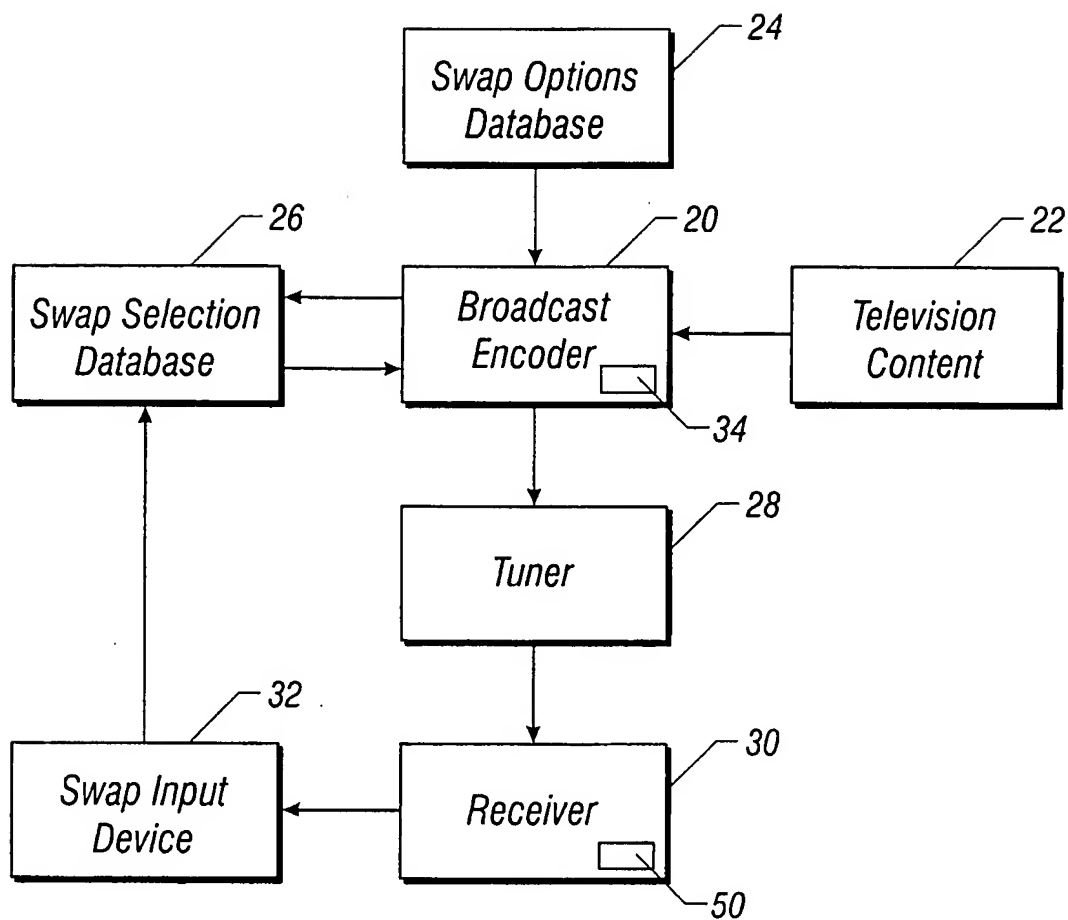


FIG. 1

2/8

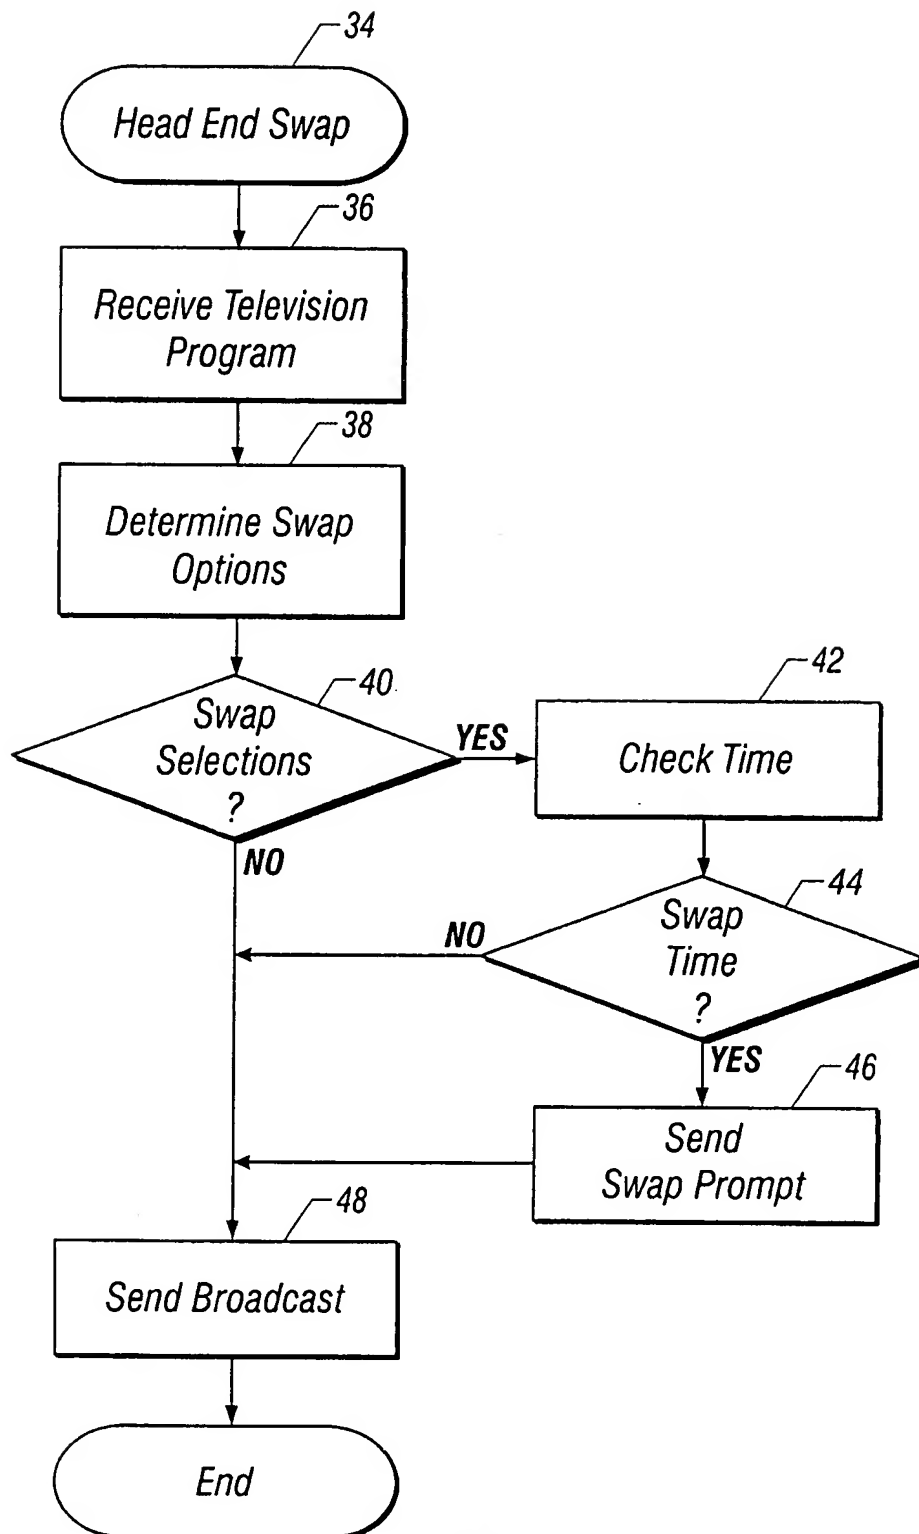


FIG. 2

3/8

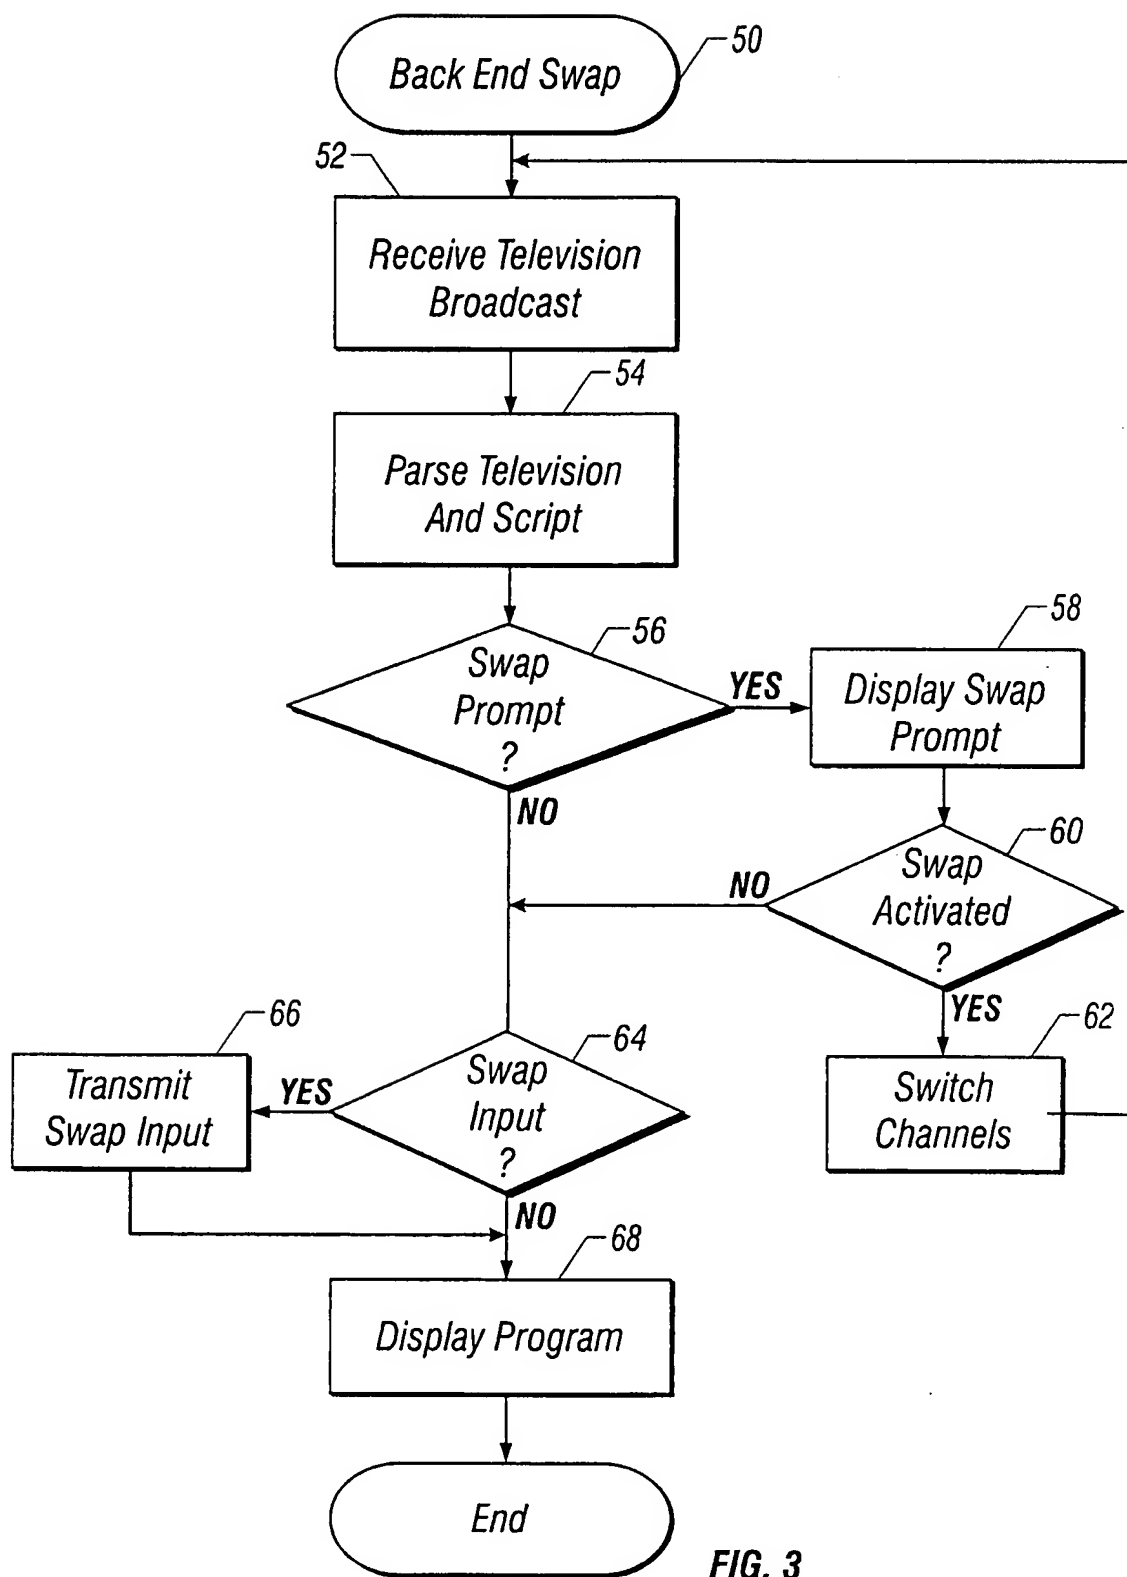


FIG. 3

4/8

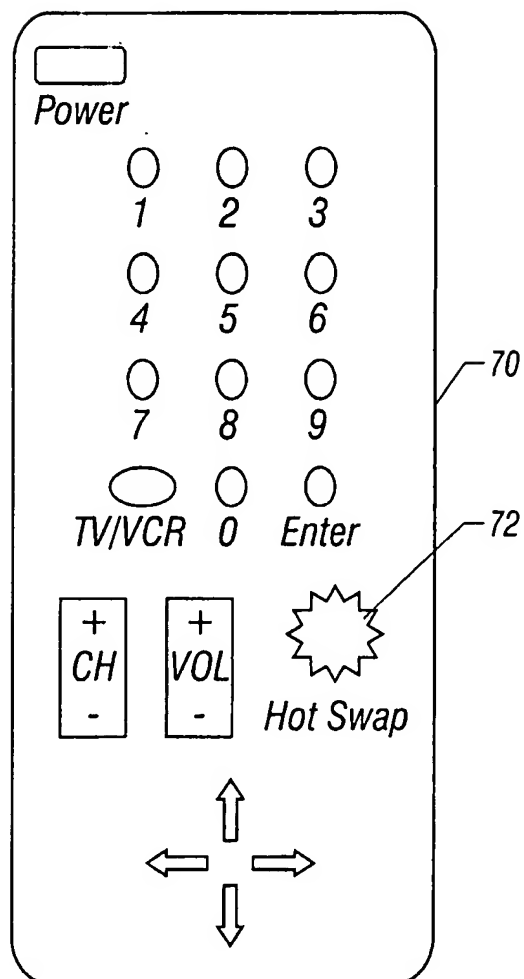


FIG. 4

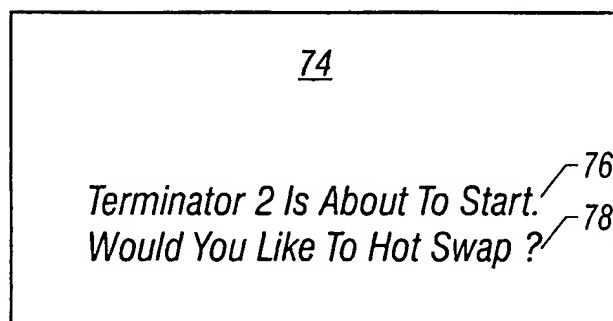


FIG. 5

5/8

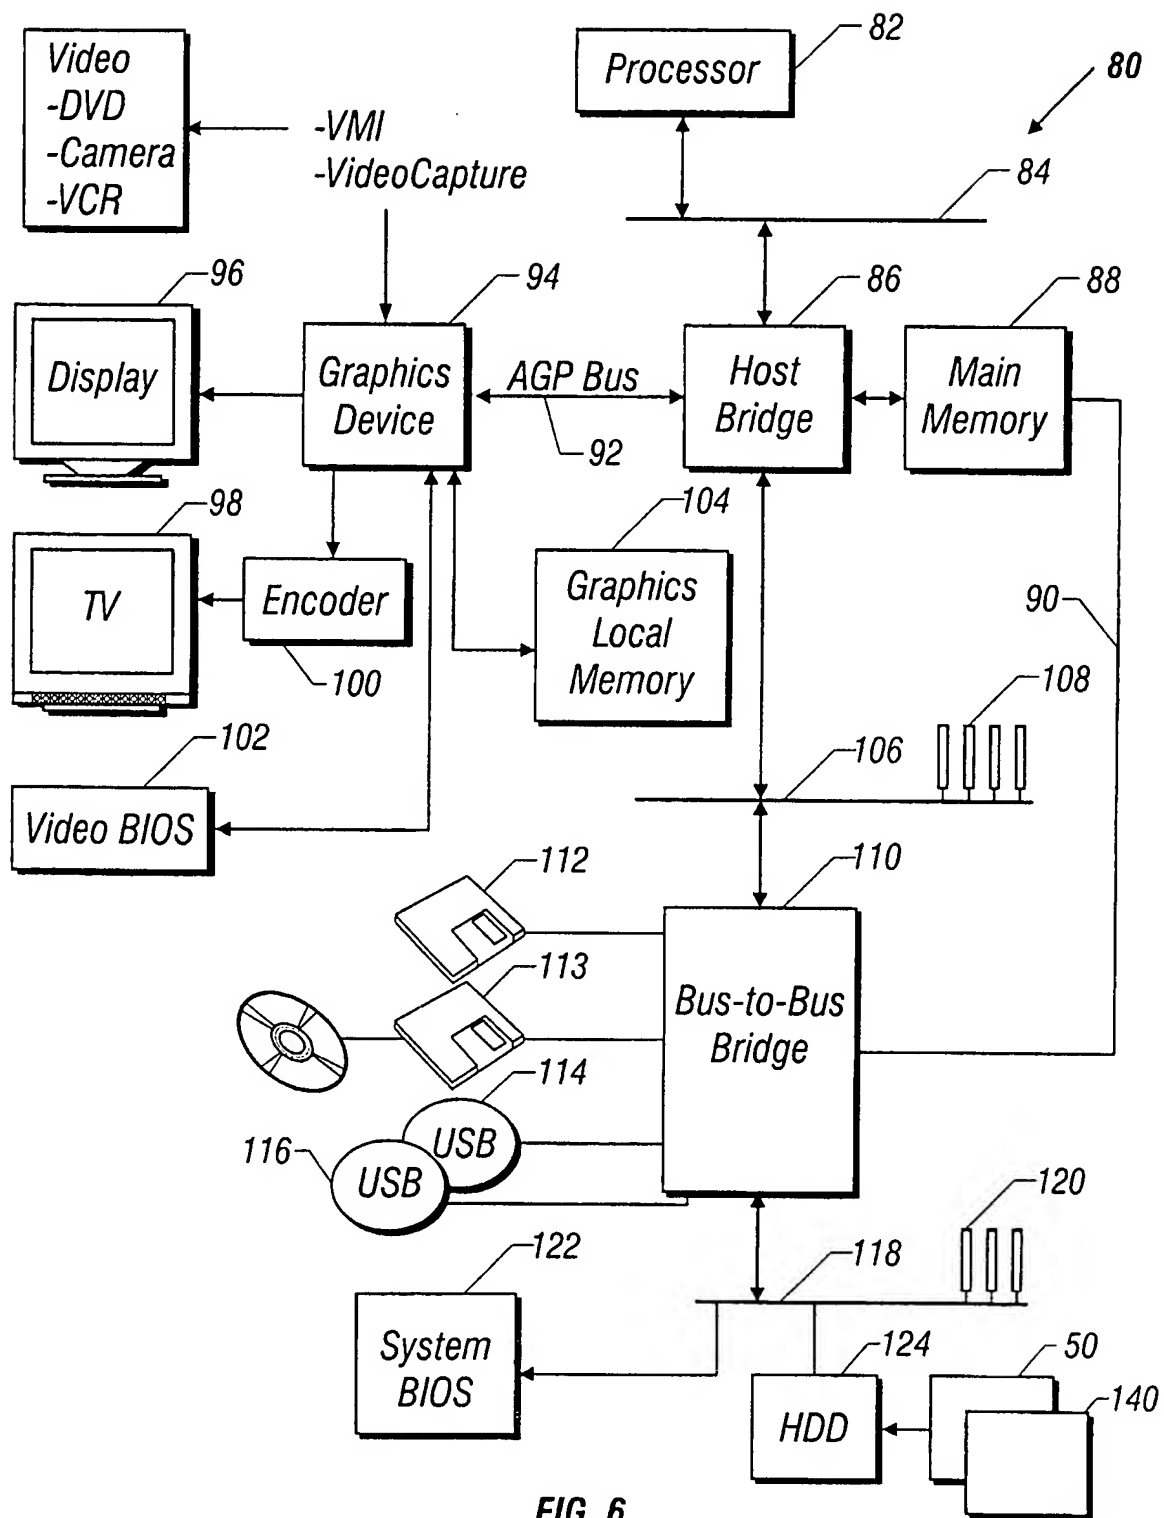


FIG. 6

126

| Games Available For Sunday September 7th | | | | | |
|--|----|--------|--------|-----------|-----------|
| Games | CH | On/Off | Type | Options | |
| Giants vs. Cowboys | 41 | On | Time-R | 2:00 min. | Remaining |
| Cardinals vs. 49ers | 42 | On | Score | - | |
| Packers vs. Lions | 45 | Off | - | - | |
| Redskins vs. Saints | 45 | On | Auto | 5 minutes | |
| Dolphins vs. Jets | 53 | On | Diff | <7 points | |

FIG. 7

7/8

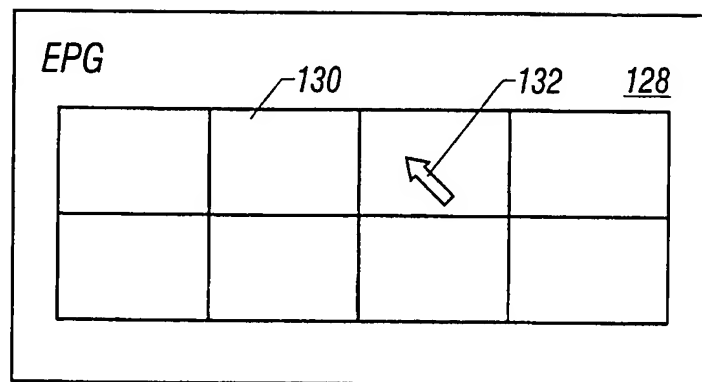


FIG. 8

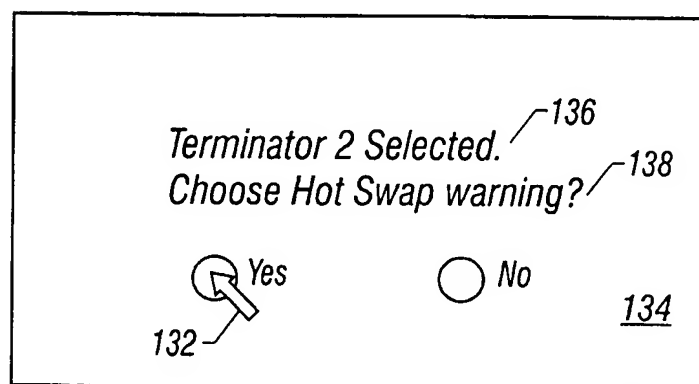


FIG. 9

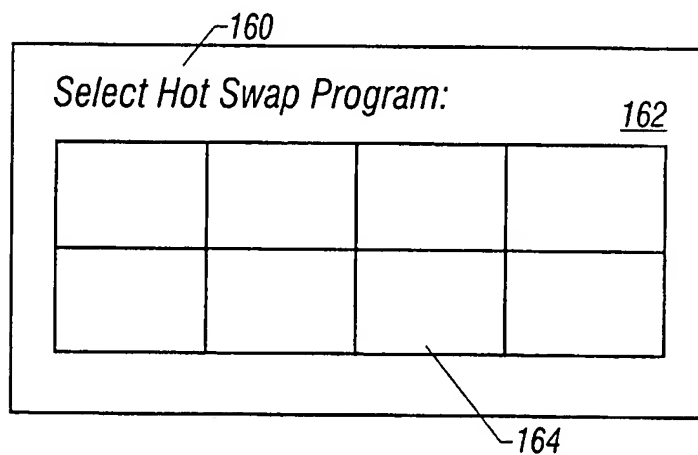


FIG. 10

8/8

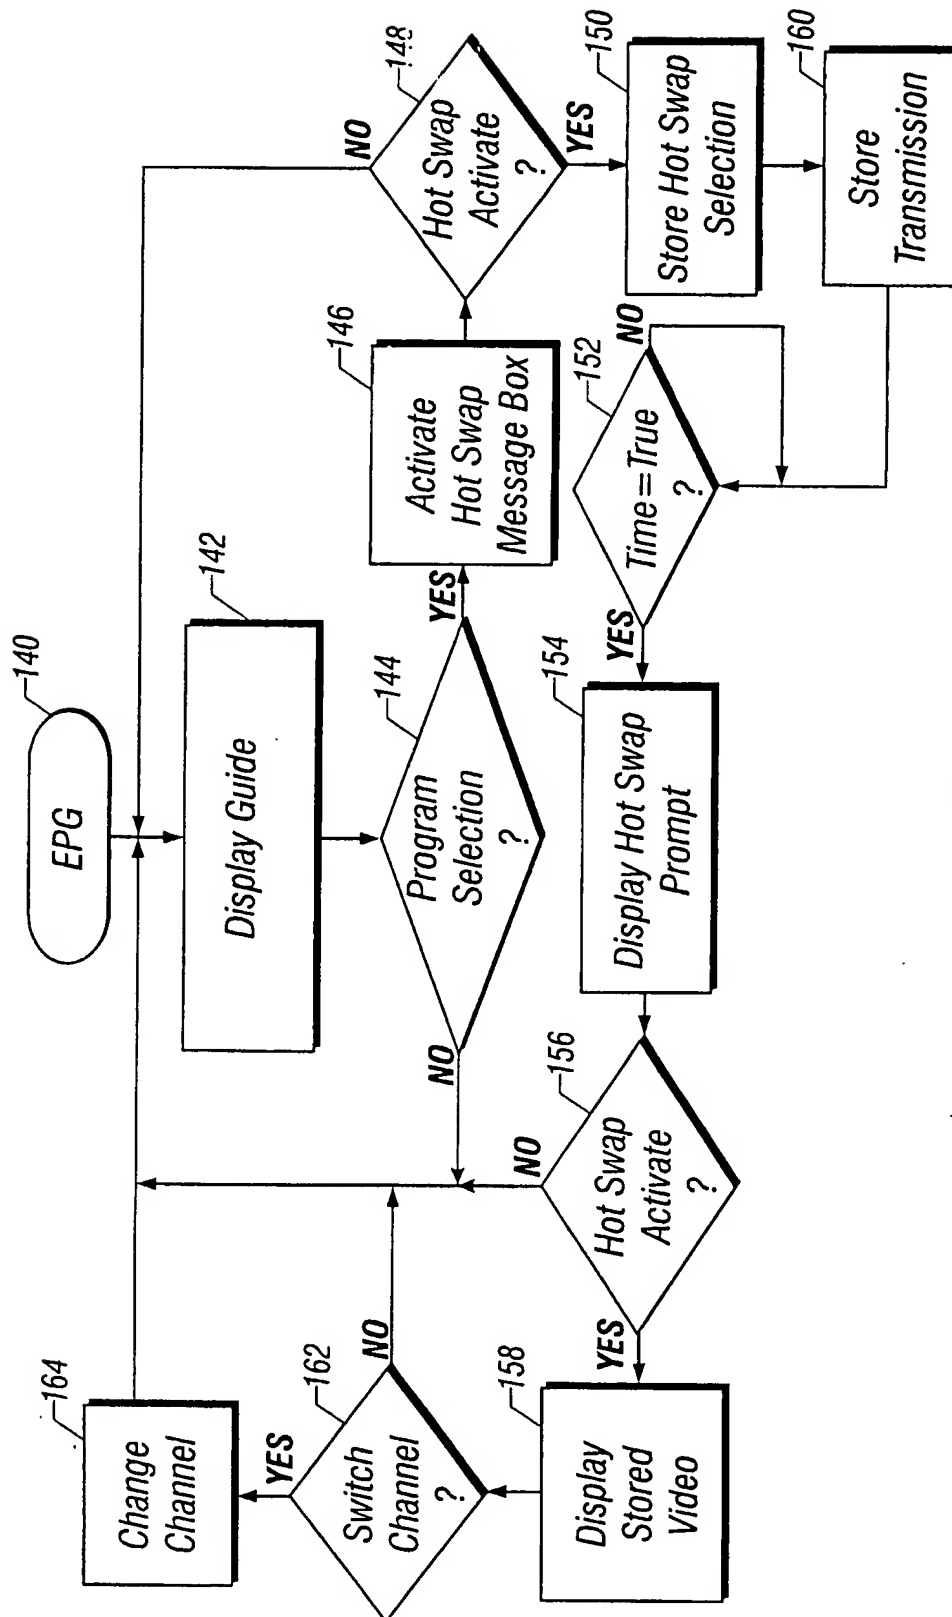


FIG. 11

INTERNATIONAL SEARCH REPORT

Int. .ional Application No

PCT/US 00/32888

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N5/445

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-------------------------------|
| X | EP 0 912 053 A (CANAL+ SOCIÉTÉ ANONYME) 28 April 1999 (1999-04-28) | 1-7, 10, 14, 16, 19, 20 |
| Y | column 1, line 1 -column 4, line 32 column 6, line 24 -column 10, line 52 --- | 8, 9, 11-13, 17, 18 |
| Y | WO 96 27840 A (TELEVITESSE SYSTEMS INC.) 12 September 1996 (1996-09-12) page 11, line 28 -page 18, line 33 --- | 8, 9, 11-13, 17, 18 |
| X | EP 0 952 737 A (INTERNATIONAL BUSINESS MACHINES CORPORATION) 27 October 1999 (1999-10-27) column 8, line 15 - line 16 column 9, line 8 -column 15, line 27 --- -/-- | 1-8, 10, 14-16, 19, 20 |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

8 document member of the same patent family

Date of the actual completion of the international search

27 March 2001

Date of mailing of the international search report

03/04/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Verschelden, J

INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/US 00/32888

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|----------------------------|
| X | US 5 659 366 A (KERMAN C.) 19 August 1997 (1997-08-19) column 3, line 25 -column 4, line 5 column 8, line 8 -column 9, line 34 --- | 1-4,10, 14-16, 19,20 |
| A | EP 0 854 645 A (TEXAS INSTRUMENTS INCORPORATED) 22 July 1998 (1998-07-22) column 11, line 15 -column 17, line 28 --- | 1-4,10, 14-16, 19,20 |
| A | US 5 589 892 A (KNEE R. ET AL) 31 December 1996 (1996-12-31) column 40, line 42 -column 45, line 17 --- | 1-7 |
| A | US 4 230 990 A (LERT J. ET AL) 28 October 1980 (1980-10-28) column 21, line 24 - line 40 --- | 8,9, 11-13 |
| A | WO 97 19555 A (PREVUE INTERNATIONAL INC.) 29 May 1997 (1997-05-29) page 6, line 14 -page 12, line 11 --- | 1-8,10, 14-16, 19,20 |
| A | WO 99 11065 A (STARSIGHT TELECAST INC.) 4 March 1999 (1999-03-04) page 4, line 37 -page 10, line 36 page 14, line 17 - line 24 ----- | 1-20 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/32888

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|----------------------------|---------------------|
| EP 912053 | A | 28-04-1999 | AU 9277898 A | 17-05-1999 |
| | | | BR 9813269 A | 22-08-2000 |
| | | | CN 1277781 T | 20-12-2000 |
| | | | EP 1025694 A | 09-08-2000 |
| | | | HR 20000228 A | 31-12-2000 |
| | | | WO 9922514 A | 06-05-1999 |
| | | | NO 20002083 A | 23-06-2000 |
| | | | PL 340043 A | 15-01-2001 |
| | | | ZA 9809222 A | 15-04-1999 |
| WO 9627840 | A | 12-09-1996 | AU 4780996 A | 23-09-1996 |
| | | | CA 2214605 A | 12-09-1996 |
| | | | EP 0813716 A | 29-12-1997 |
| | | | JP 11505682 T | 21-05-1999 |
| EP 952737 | A | 27-10-1999 | JP 2000078488 A | 14-03-2000 |
| | | | TW 411710 B | 11-11-2000 |
| US 5659366 | A | 19-08-1997 | DE 69604614 D | 18-11-1999 |
| | | | DE 69604614 T | 25-05-2000 |
| | | | EP 0742669 A | 13-11-1996 |
| | | | JP 8307840 A | 22-11-1996 |
| EP 854645 | A | 22-07-1998 | JP 10207914 A | 07-08-1998 |
| | | | SG 67469 A | 21-09-1999 |
| | | | US 6163316 A | 19-12-2000 |
| US 5589892 | A | 31-12-1996 | US 5781246 A | 14-07-1998 |
| | | | AU 700302 B | 24-12-1998 |
| | | | AU 6258596 A | 30-12-1996 |
| | | | BR 9609120 A | 24-08-1999 |
| | | | CA 2223057 A | 19-12-1996 |
| | | | CN 1190517 A | 12-08-1998 |
| | | | EP 0856227 A | 05-08-1998 |
| | | | JP 11505094 T | 11-05-1999 |
| | | | PL 323914 A | 27-04-1998 |
| | | | WO 9641478 A | 19-12-1996 |
| | | | US 6014184 A | 11-01-2000 |
| | | | AU 712344 B | 04-11-1999 |
| | | | AU 5572996 A | 18-11-1996 |
| | | | BR 9608005 A | 05-01-1999 |
| | | | CA 2218993 A | 31-10-1996 |
| | | | EP 0823179 A | 11-02-1998 |
| | | | JP 11501481 T | 02-02-1999 |
| | | | PL 323047 A | 02-03-1998 |
| | | | WO 9634491 A | 31-10-1996 |
| | | | US 5585866 A | 17-12-1996 |
| | | | US 5822123 A | 13-10-1998 |
| US 4230990 | A | 28-10-1980 | NONE | |
| WO 9719555 | A | 29-05-1997 | US 6157413 A | 05-12-2000 |
| | | | AU 707081 B | 01-07-1999 |
| | | | AU 1021797 A | 11-06-1997 |
| | | | BR 9611743 A | 23-02-1999 |
| | | | EP 0862833 A | 09-09-1998 |
| | | | JP 2000500637 T | 18-01-2000 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/32888

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| WO 9911065 A | 04-03-1999 | AU 9211598 A | 16-03-1999 |
| | | CN 1274505 T | 22-11-2000 |
| | | EP 1013087 A | 28-06-2000 |
| ----- | | | |